

■ Specifications

SW-1

Current rating at 250V

Material

Dimensions

Operating temperature

Protection degree

Mechanical lifecycle

Warranty

Cable

Accessories

Push button

Nominal 5A

Thermal 12A

Stainless steel 304, mat polished

250 * 75 * 15mm (L * W * H)

-40°C to +85°C

IP 67


ca. 2 million switches

2 years


3 x 0.75 mm, 500 mm length

filled waterproof

3 stickers

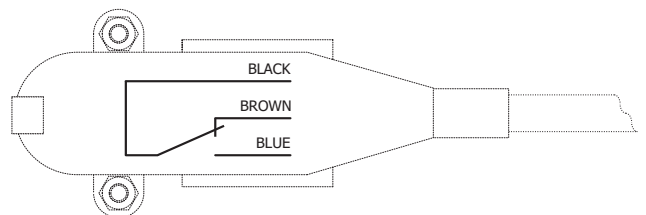

The specifications herein are subject to change without prior notice due to improvements.

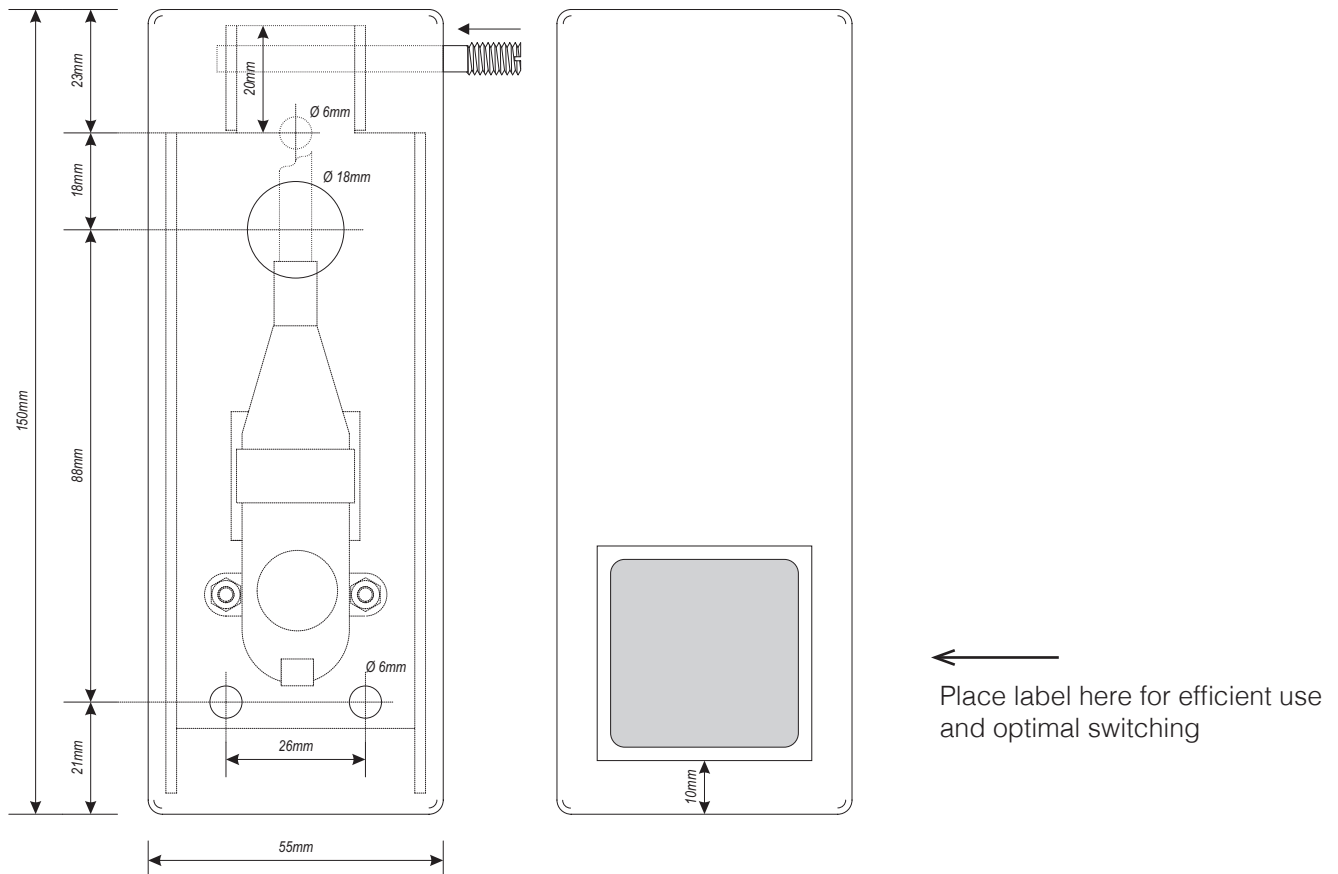

Specifications

SW-2	Push button
Current rating at 250V	Nominal 5A
	Thermal 12A
Material	Stainless steel 304, mat polished
Dimensions	150 * 55 * 15mm (L * W * H)
Operating temperature	-40°C to +85°C
Protection degree	IP 67
Mechanical lifecycle	ca. 2 million switches
Warranty	2 years
Cable	3 x 0.75 mm, 500 mm length
	filled waterproof
Accessories	3 stickers

The specifications herein are subject to change without prior notice due to improvements.

